



**FOR SALES, SAMPLES OR
TECHNICAL SERVICE**

Call 1-800-252-0039

1-423-629-7160

Fax 1-423-698-0614

Visit Sphere One at our website:

www.sphereone.net

EXTENDOSPHERES™ SLT Hollow Spheres

EXTENDOSPHERES™ SL product lines increase the solid content of coating without the need for the addition of suspending agents. Self suspending Extendospheres™ are manufactured to reduce the VOC, which will result in lower shrinkage and reduced drying time.

The SL Extendospheres™ will improve abrasion resistance, modulus elongation, and the flow of paints resulting in a more durable coating. SL grades are an excellent choice for caulks, adhesives, paints, coatings, white roof and grouts.

Extendospheres™ SLT is an excellent choice where gas permeability is important, applications include cementitious coatings and grouts. Extendospheres™ SLT can be used effectively for replacing or blending with more expensive hollow spheres products.


PACKAGING

EXTENDOSPHERES™ SLT hollow spheres are supplied in. 50 lb (40) multi-wall bags, 2,000 lbs. per pallet. Samples in sufficient quantity for testing are available upon request.

SAFETY INFORMATION

In areas where these hollow spheres create a dust, the use of a NIOSH-approved mask or respirator is recommended. Material Safety Data Sheet (MSDS) will be supplied upon request.

TYPICAL PROPERTIES OF EXTENDOSPHERES™ SLT CERAMIC HOLLOW SPHERES	
Physical Form	Free-Flowing Powder
Appearance	Off White
Particle Size SLT	Microns 10-300
Mean Particle Size SLT	Microns 90 +/- 10
Bulk Density	0.40 g/cc
Density	0.73 g/cc
Deformation Temperature	>1500°C
Compressive Strength	<10% @ 3,000 psi

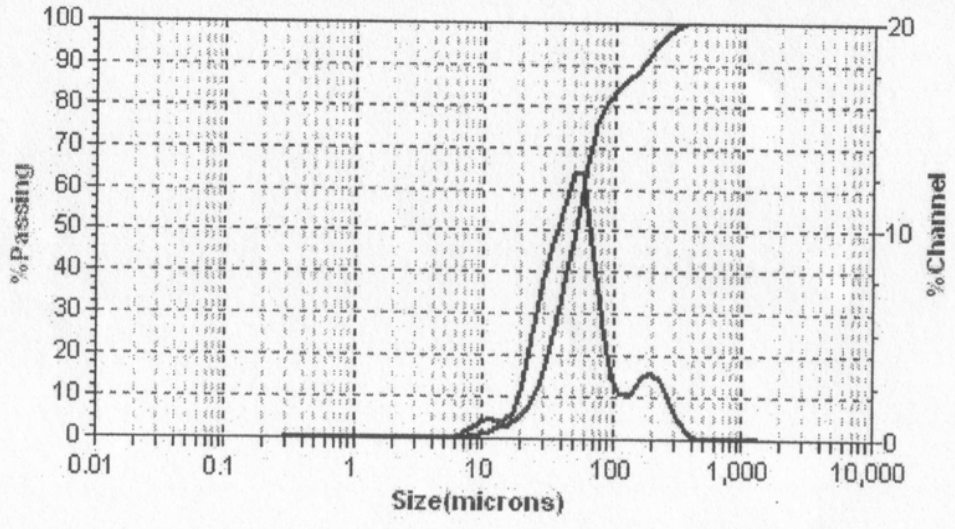

Microtrac 3500S

The technical information presented herein represents the best information available to us and is believed to be reliable. Sphere One, Inc. makes no warranties, either expressed or implied, with respect to our materials, including the warranties of merchantability or fitness for any particular purpose. We urge that users of our materials conduct tests to determine suitability for their specific end uses.